

Manual stacker with forged forks

RVV500-KPV / RVV1000-KPV / RVV1500-KPV

500 - 1500 kg

Lift height: 1600 / 2500 mm

A manual stacker with laterally adjustable forged forks and fixed support legs. Choose the capacity, lift height and fork length for the load.



- Adjustable forged forks.
- Fork lengths 800 or 1060 mm.
- Rigid steel mast and frame.
- Hydraulic lifting by hand and foot.
- Hand-operated lowering.
- Metal mesh guard separates the operator from the lifting chains.
- Wheel guards and parking brake.

Representative configuration shown. Select the model and lift height from the specifications.

Models and lift heights

Parameter	Unit / symbol	RVV500-KPV	RVV1000-KPV	RVV1500-KPV
Rated capacity	Q (kg)	500	1000	1500
Load centre distance	c (mm)	500	500	500
Maximum lift height	h3 (mm)	1600	1600 / 2500	1600

The 2500 mm lift height is available for the 1000 kg model only.

DELACCO d.o.o. | Čabdin 53, 10450 Jastrebarsko, Croatia

+385 91 25 50 100 sales@delacco.com delacco.com

VAT ID HR61037617977

B2B supply

DELACCO EUROPE

AL|AT|BE|BA|BG|HR|CZ|DK|EE|FI|FR|DE|GR|HU|IS|IE|IT|LV|LT|LU|MD|ME|NL|MK|NO|PL|PT|RO|RS|SK|SI|ES|SE|CH|TR|UA|GB

Manual stacker with forged forks

RVV500-KPV / RVV1000-KPV / RVV1500-KPV

Technical specifications

Parameter	Unit / symbol	RVV500-KPV	RVV1000-KPV	RVV1500-KPV
Rated capacity	Q (kg)	500	1000	1500
Load centre distance	c (mm)	500	500	500
Lowered fork height	h13 (mm)	80	90	90
Mast height, lowered	h1 (mm)	1990	2085 / 1840	2085
Maximum lift height	h3 (mm)	1600	1600 / 2500	1600
Mast height, extended	h4 (mm)	2010	2125 / 3050	2125
Overall length	l1 (mm)	1380 / 1640	1332(1592) / 1355(1615)	1355 / (1615)
Overall width	b1 (mm)	805	1000 / 860	1000
Fork dimensions	s/e/l (mm)	48 / 100 / 800(1060)	30 / 100 / 800(1060)	30 / 100 / 800(1060)
Overall fork spread	b5 (mm)	200-745	200-950 / 700	200-950
Ground clearance, laden, below mast	m1 (mm)	20	25	25
Aisle, 1000 x 1200 mm pallet crossways	Ast (mm)	1996(2137)	2002(2156) / 2030(2180)	2025(2185)
Aisle, 800 x 1200 mm pallet lengthways	Ast (mm)	- (2050)	- (2043) / - (2063)	- (2068)
Turning radius	Wa (mm)	1180(1420)	1210(1450) / 1255(1475)	1235(1480)
Lift per stroke, laden / unladen	mm/stroke	23 / 25	20 / 22	16 / 18
Lowering, laden / unladen		Manual control	Manual control	Manual control
Service weight	kg	161(170)	250(265) / 316(331)	280(295)


Slash-separated and bracketed values identify alternative configurations. A dash means no value is specified. The 2500 mm lift height is listed for the 1000 kg model only.

Manual stacker with forged forks


RVV500-KPV / RVV1000-KPV / RVV1500-KPV

Dimensions and configuration

Side view

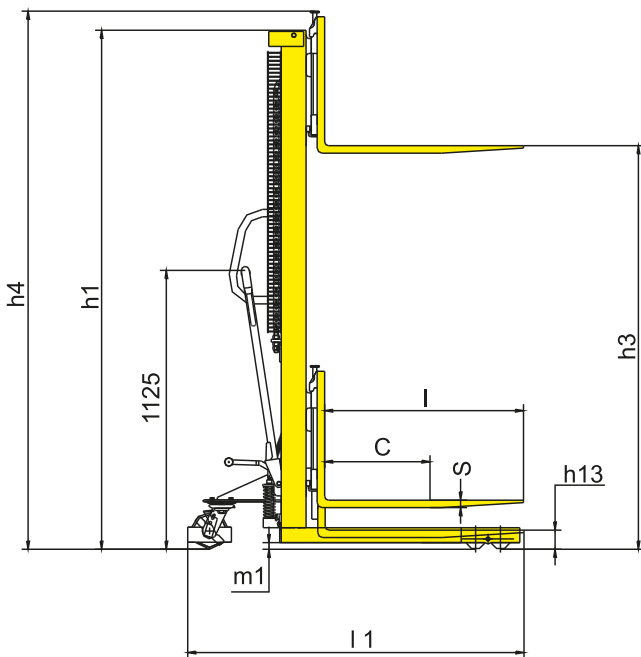

Top view / operating aisle

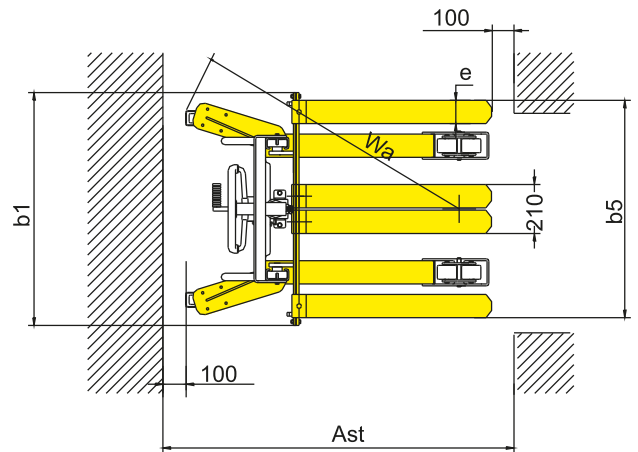

Dimension reference; not an installation drawing. Dimensions depend on the selected model and configuration.

Configuration notes

Adjustable forged lifting forks with fixed support legs.

Fork lengths: 800 mm, with 1060 mm alternative.

DELACCO d.o.o. | Čabdin 53, 10450 Jastrebarsko, Croatia

+385 91 25 50 100 sales@delacco.com delacco.com

DELACCO EUROPE

AL|AT|BE|BA|BG|HR|CZ|DK|EE|FI|FR|DE|GR|HU|IS|IE|IT|LV|LT|LU|MD|ME|NL|MK|NO|PL|PT|RO|RS|SK|SI|ES|SE|CH|TR|UA|GB

VAT ID HR61037617977

B2B supply