

Manual stacker with adjustable forks

RVV2000-KPV / RVV2000T-KPV

2000 kg

Lift height: 1500 mm

A foot-operated hydraulic stacker for 2000 kg loads, with two adjustable fork profiles and manually controlled lowering.

- Two fork profiles: 30/120/900 mm and 60/166/900 mm.
- Rigid steel mast and frame.
- Foot-operated hydraulic lifting.
- Fold-away foot pedal.
- Screw-release control for lowering.
- Metal mesh guard protects the operator from lifting chains.
- Wheel guards and parking brake.



Main photograph: RVV2000-KPV. The RVV2000T-KPV fork profile is shown on the dimensions page.

Models and lift heights

Parameter	Unit / symbol	RVV2000-KPV	RVV2000T-KPV
Rated capacity	Q (kg)	2000	2000
Load centre distance	c (mm)	400	400
Maximum lift height	h3 (mm)	1500	1500

Manual stacker with adjustable forks

RVV2000-KPV / RVV2000T-KPV

Technical specifications

Parameter	Unit / symbol	RVV2000-KPV	RVV2000T-KPV
Rated capacity	Q (kg)	2000	2000
Load centre distance	c (mm)	400	400
Lowered fork height	h13 (mm)	90	90
Mast height, lowered	h1 (mm)	2085	2085
Maximum lift height	h3 (mm)	1500	1500
Mast height, extended	h4 (mm)	2085	2085
Overall length	l1 (mm)	1410	1516
Overall width	b1 (mm)	1000	830
Fork dimensions	s/e/l (mm)	30 / 120 / 900	60 / 166 / 900
Overall fork spread	b5 (mm)	250-950	350-710
Ground clearance, laden, below mast	m1 (mm)	25	20
Aisle, 1000 x 1200 mm pallet crossways	Ast (mm)	2050	2166
Aisle, 800 x 1200 mm pallet lengthways	Ast (mm)	2040	-
Turning radius	Wa (mm)	1250	1250
Lift per stroke, laden / unladen	mm/stroke	18 / 20	18 / 20
Lowering, laden / unladen		Manual control	Manual control
Service weight	kg	292	260


Slash-separated and bracketed values identify alternative configurations. A dash means no value is specified.

Manual stacker with adjustable forks


RVV2000-KPV / RVV2000T-KPV

Dimensions and configuration

Side view

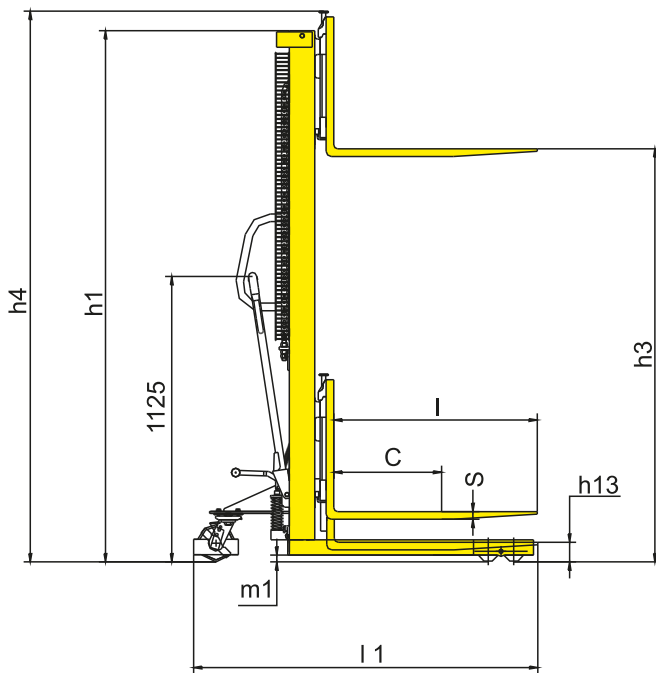

Top view / operating aisle

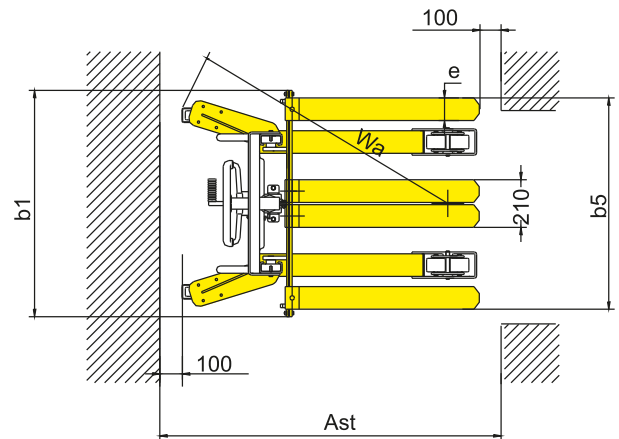

Dimension reference; not an installation drawing. Dimensions depend on the selected model and configuration.



RVV2000T-KPV fork profile

Fork dimensions (s/e/l): 60/166/900 mm.
Overall fork spread: 350-710 mm.

DELACCO d.o.o. | Čabdin 53, 10450 Jastrebarsko, Croatia

+385 91 25 50 100 sales@delacco.com delacco.com

DELACCO EUROPE

AL|AT|BE|BA|BG|HR|CZ|DK|EE|FI|FR|DE|GR|HU|IS|IE|IT|LV|LT|LU|MD|ME|NL|MK|NO|PL|PT|RO|RS|SK|SI|ES|SE|CH|TR|UA|GB

VAT ID HR61037617977

B2B supply