

Manual stacker with adjustable forks

RVV1000-PV / RVV1500-PV

1000 / 1500 kg

Lift height: 1600 / 2500 mm

A manual stacker with shaft-mounted adjustable forks, hydraulic lifting and fixed support legs.



- Shaft-mounted forks for lateral adjustment.
- Welded forks, 1070 or 1150 mm long.
- Rigid steel mast and frame.
- Hydraulic lifting by hand and foot.
- Hand-operated lowering.
- Metal mesh guard separates the operator from the lifting chains.
- Wheel guards and parking brake.

Representative configuration shown. Select the model and lift height from the specifications.

Models and lift heights

Parameter	Unit / symbol	RVV1000-PV	RVV1500-PV
Rated capacity	Q (kg)	1000	1500
Load centre distance	c (mm)	500	500
Maximum lift height	h3 (mm)	1600 / 2500	1600

The 2500 mm lift height is available for the 1000 kg model only.

DELACCO d.o.o. | Čabdin 53, 10450 Jastrebarsko, Croatia

+385 91 25 50 100 sales@delacco.com delacco.com

VAT ID HR61037617977

B2B supply

DELACCO EUROPE

AL|AT|BE|BA|BG|HR|CZ|DK|EE|FI|FR|DE|GR|HU|IS|IE|IT|LV|LT|LU|MD|ME|NL|MK|NO|PL|PT|RO|RS|SK|SI|ES|SE|CH|TR|UA|GB

Manual stacker with adjustable forks

RVV1000-PV / RVV1500-PV

Technical specifications

Parameter	Unit / symbol	RVV1000-PV	RVV1500-PV
Rated capacity	Q (kg)	1000	1500
Load centre distance	c (mm)	500	500
Lowered fork height	h13 (mm)	90	90
Mast height, lowered	h1 (mm)	2080 / 1840	2085
Maximum lift height	h3 (mm)	1600 / 2500	1600
Mast height, extended	h4 (mm)	2080 / 2960	2085
Overall length	l1 (mm)	1650(1730) / 1660(1740)	1660(1740)
Overall width	b1 (mm)	967 / 886	967
Fork dimensions	s/e/l (mm)	60 / 142 / 1070(1150)	60 / 154 / 1070(1150)
Overall fork spread	b5 (mm)	295-930 / 295-850	310-930
Ground clearance, laden, below mast	m1 (mm)	20	25
Aisle, 1000 x 1200 mm pallet crossways	Ast (mm)	2048	2063
Aisle, 800 x 1200 mm pallet lengthways	Ast (mm)	2030	2040
Turning radius	Wa (mm)	1260 / 1253	1280
Lift per stroke, laden / unladen	mm/stroke	20 / 22	16 / 18
Lowering, laden / unladen		Manual control	Manual control
Service weight	kg	250 / 322	270


Slash-separated and bracketed values identify alternative configurations. A dash means no value is specified. The 2500 mm lift height is listed for the 1000 kg model only.

Manual stacker with adjustable forks


RVV1000-PV / RVV1500-PV

Dimensions and configuration

Side view

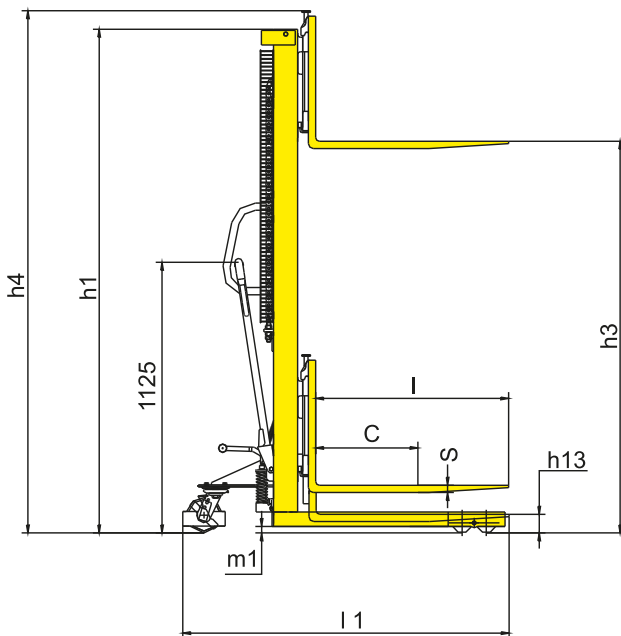

Top view / operating aisle

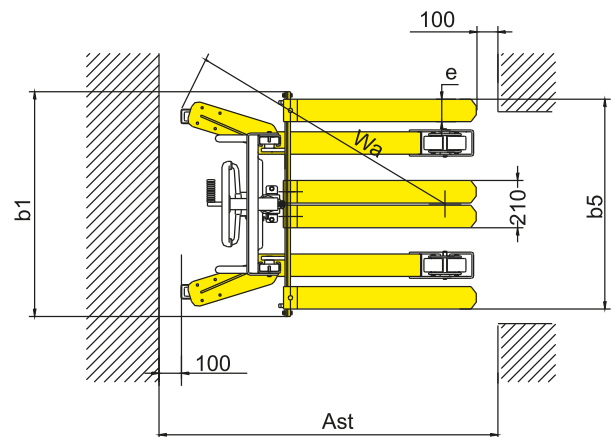

Dimension reference; not an installation drawing. Dimensions depend on the selected model and configuration.

Configuration notes

Shaft-mounted adjustable lifting forks with fixed support legs.

Fork lengths: 1070 mm, with 1150 mm alternative.

DELACCO d.o.o. | Čabdin 53, 10450 Jastrebarsko, Croatia

+385 91 25 50 100 sales@delacco.com delacco.com

DELACCO EUROPE

AL|AT|BE|BA|BG|HR|CZ|DK|EE|FI|FR|DE|GR|HU|IS|IE|IT|LV|LT|LU|MD|ME|NL|MK|NO|PL|PT|RO|RS|SK|SI|ES|SE|CH|TR|UA|GB