

MOBILE DOUBLE SCISSOR LIFT TABLE

MPS150D

A robust solution for lifting, lowering and short-distance transport of loads up to 150 kg.



MPS150D - lifting height 1100 mm, service weight 64 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS150D is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Double scissor mechanism**

Two scissor stages reach a 1100 mm lifting height from a 302 mm lowered position.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 700 x 450 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

100 mm wheels and a service weight of 64 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

The double scissor mechanism lifts loads up to an ergonomic 1100 mm while keeping the compact footprint of a small platform truck.

Parameter	MPS150D
DELACCO model	MPS150D
Rated capacity	150 kg
Maximum platform height	1100 mm
Minimum platform height	302 mm
Platform dimensions (L x W x H)	700 x 450 x 35 mm
Handle height	921 mm
Overall length	773 mm
Pedal strokes to maximum height	<= 30
Wheel diameter	100 mm
Cylinder working volume	115 ml
Hydraulic oil capacity	250 ml
Service weight	64 kg


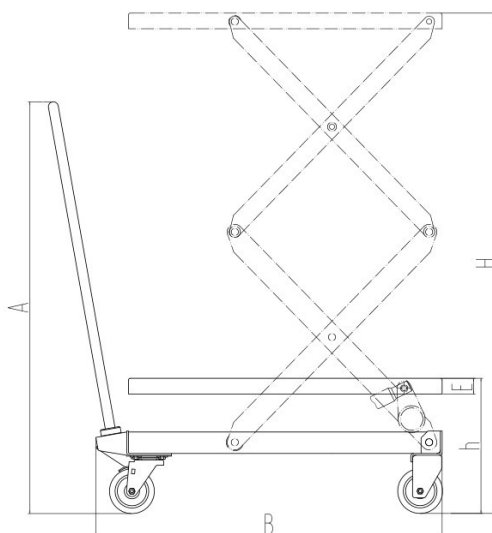


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

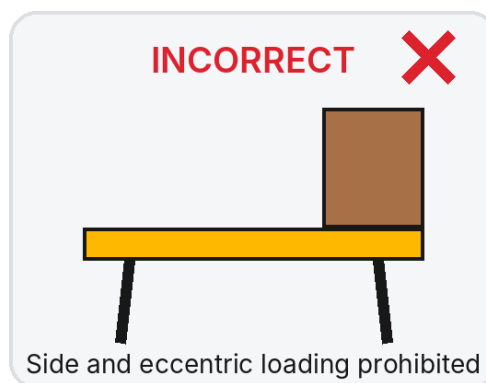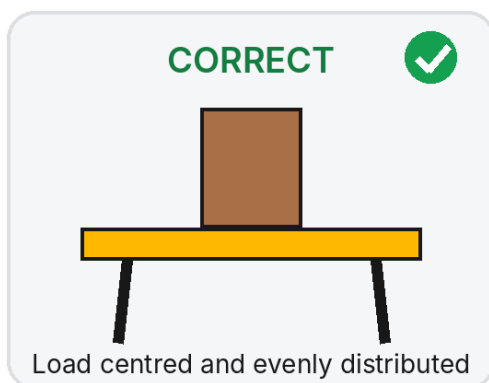

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 150 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.