

MOBILE DOUBLE SCISSOR LIFT TABLE

MPS680D

A robust solution for lifting, lowering and short-distance transport of loads up to 680 kg.



MPS680D - lifting height 1500 mm, service weight 185 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS680D is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **High lifting height**

The double scissor mechanism reaches 1500 mm - ideal for feeding machines and conveyors.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 1220 x 610 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

150 mm wheels and a service weight of 185 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

A 680 kg rated capacity and a 1500 mm lifting height on a large 1220 x 610 mm platform for demanding handling tasks.

Parameter	MPS680D
DELACCO model	MPS680D
Rated capacity	680 kg
Maximum platform height	1500 mm
Minimum platform height	474 mm
Platform dimensions (L x W x H)	1220 x 610 x 55 mm
Handle height	1038 mm
Overall length	1289 mm
Pedal strokes to maximum height	35 / 80
Wheel diameter	150 mm
Cylinder working volume	382 ml
Hydraulic oil capacity	700 ml
Service weight	185 kg


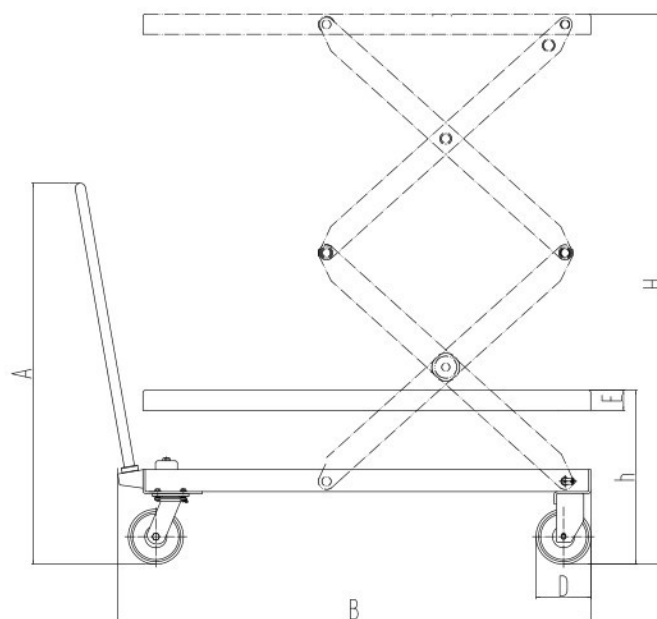


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

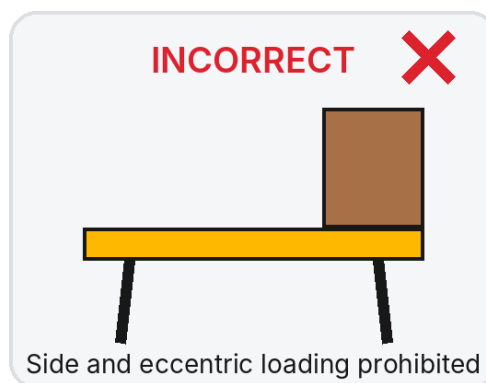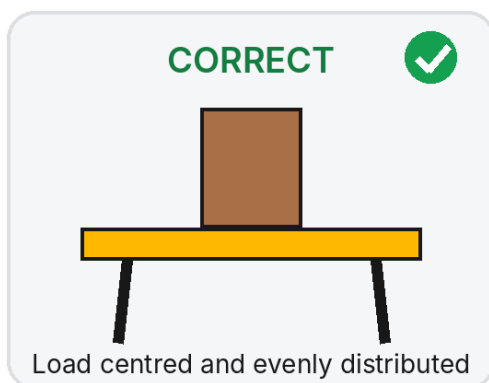

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 680 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.