

MOBILE SCISSOR LIFT TABLES

MPS150 / MPS150A

A compact solution for lifting, lowering and short-distance transport of loads up to 150 kg.



MPS150 shown. The MPS150A features a longer platform and greater overall length.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS range is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Foldable handle**

The handle folds down for easier storage and transport.

- **Compact dimensions**

100 mm wheels and a service weight of 44 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

Choose the version that best matches the required platform length. Both models provide the same rated capacity and lifting height.

Parameter	MPS150	MPS150A
DELACCO model	MPS150	MPS150A
Rated capacity	150 kg	150 kg
Maximum platform height	740 mm	740 mm
Minimum platform height	225 mm	225 mm
Platform dimensions (L x W x H)	700 x 450 x 35 mm	740 x 450 x 35 mm
Handle height	935 mm	935 mm
Overall length	770 mm	830 mm
Pedal strokes to maximum height	<= 25	<= 25
Wheel diameter	100 mm	100 mm
Cylinder working volume	115 ml	115 ml
Hydraulic oil capacity	220 ml	220 ml
Service weight	44 kg	44 kg


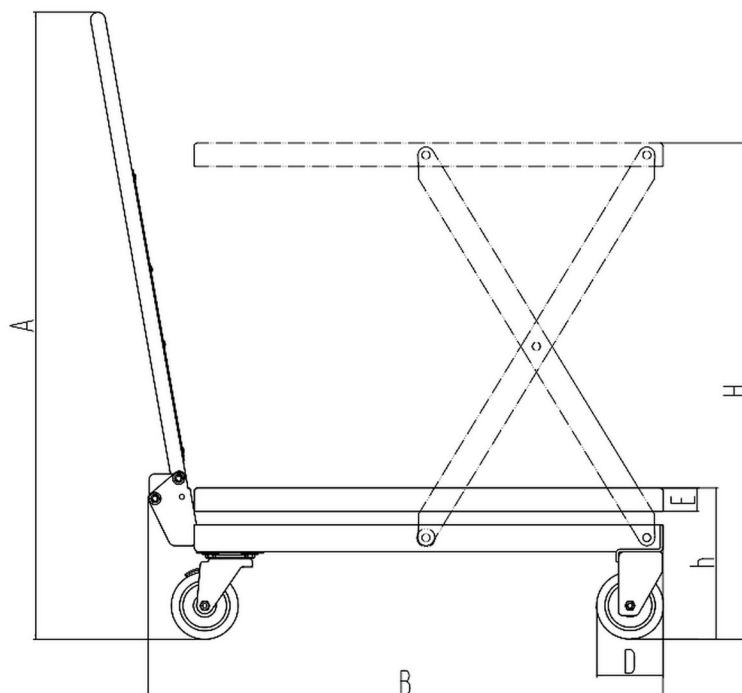


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

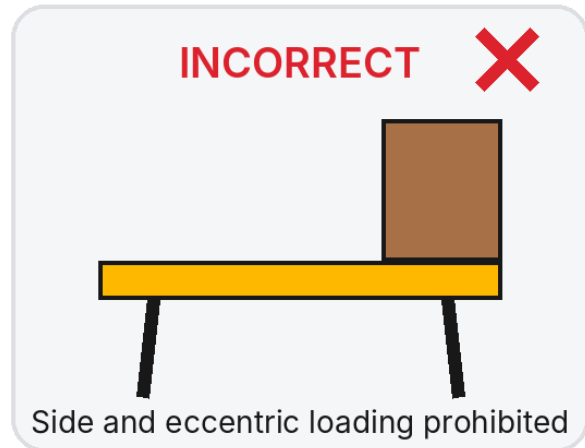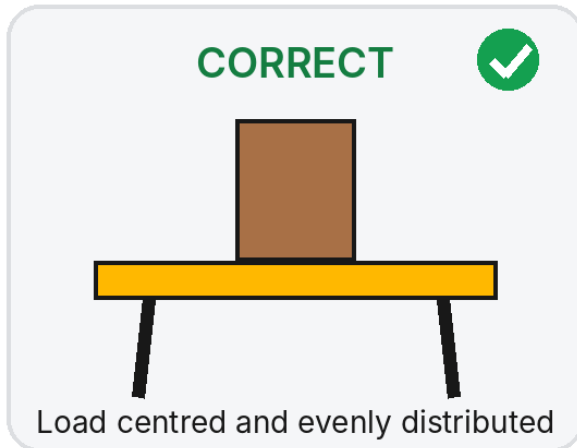

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 150 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com

sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.