

MOBILE SCISSOR LIFT TABLE

MPS1500

A robust solution for lifting, lowering and short-distance transport of loads up to 1500 kg.



MPS1500 - lifting height 1000 mm, service weight 135 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS1500 is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Maximum capacity**

Rated for loads up to 1500 kg - the strongest model in the MPS range.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 1220 x 610 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

150 mm wheels and a service weight of 135 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

The strongest table in the MPS range: 1500 kg rated capacity on a large 1220 x 610 mm platform.

Parameter	MPS1500
DELACCO model	MPS1500
Rated capacity	1500 kg
Maximum platform height	1000 mm
Minimum platform height	420 mm
Platform dimensions (L x W x H)	1220 x 610 x 60 mm
Handle height	962 mm
Overall length	1379 mm
Pedal strokes to maximum height	<= 70
Wheel diameter	150 mm
Cylinder working volume	310 ml
Hydraulic oil capacity	400 ml
Service weight	135 kg


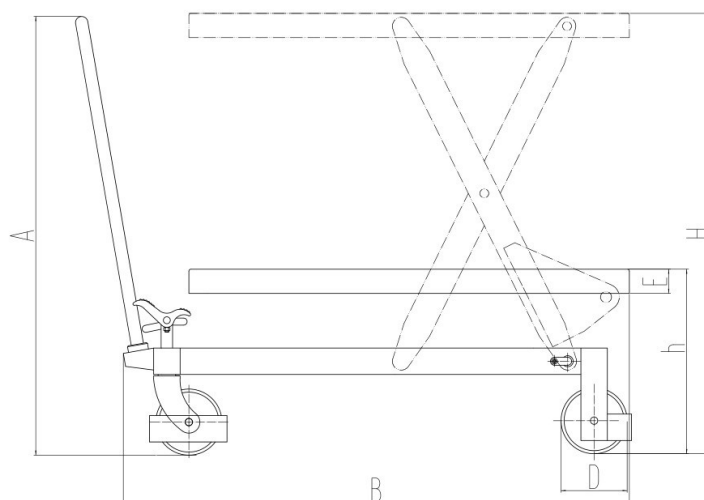


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

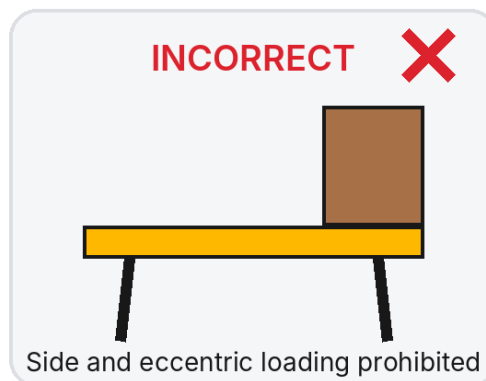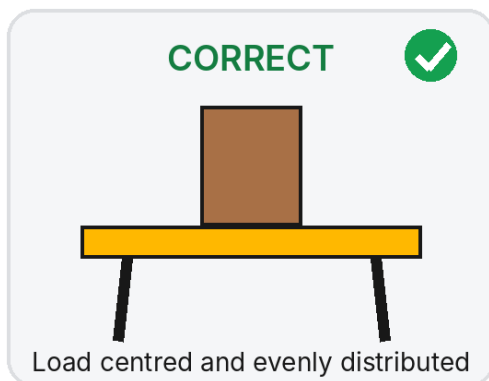

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 1500 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.