

MOBILE SCISSOR LIFT TABLE

MPS300

A robust solution for lifting, lowering and short-distance transport of loads up to 300 kg.



MPS300 - lifting height 900 mm, service weight 82 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS300 is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Solid steel construction**

A rigid 855 x 500 mm platform and robust scissor arms carry loads up to 300 kg.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 855 x 500 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

127 mm wheels and a service weight of 82 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

A 300 kg rated capacity and a 900 mm lifting height cover everyday lifting tasks in workshops and production areas.

Parameter	MPS300
DELACCO model	MPS300
Rated capacity	300 kg
Maximum platform height	900 mm
Minimum platform height	340 mm
Platform dimensions (L x W x H)	855 x 500 x 50 mm
Handle height	970 mm
Overall length	925 mm
Pedal strokes to maximum height	<= 32
Wheel diameter	127 mm
Cylinder working volume	164 ml
Hydraulic oil capacity	250 ml
Service weight	82 kg


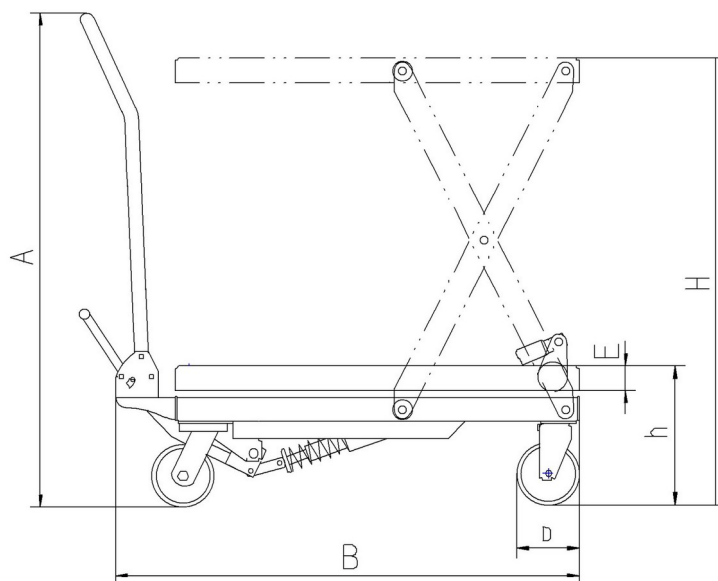


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

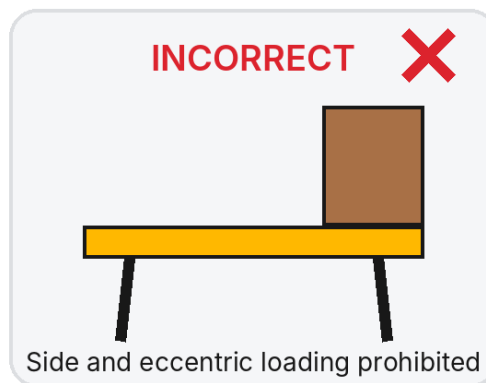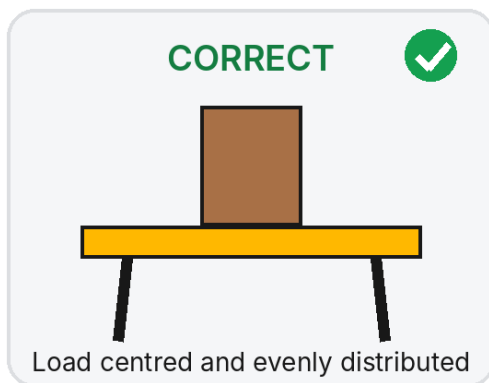

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 300 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.