

MOBILE SCISSOR LIFT TABLE WITH LARGE PLATFORM

MPS500T

A robust solution for lifting, lowering and short-distance transport of loads up to 500 kg.



MPS500T - lifting height 915 mm, service weight 136 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS500T is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Extra-large platform**

The 1600 x 800 mm platform accommodates long workpieces, profiles and bulky goods.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 1600 x 800 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

127 mm wheels and a service weight of 136 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

The extra-large 1600 x 800 mm platform carries long and bulky loads up to 500 kg at an ergonomic working height.

Parameter	MPS500T
DELACCO model	MPS500T
Rated capacity	500 kg
Maximum platform height	915 mm
Minimum platform height	310 mm
Platform dimensions (L x W x H)	1600 x 800 x 50 mm
Handle height	970 mm
Overall length	1670 mm
Pedal strokes to maximum height	<= 55
Wheel diameter	127 mm
Cylinder working volume	255 ml
Hydraulic oil capacity	400 ml
Service weight	136 kg


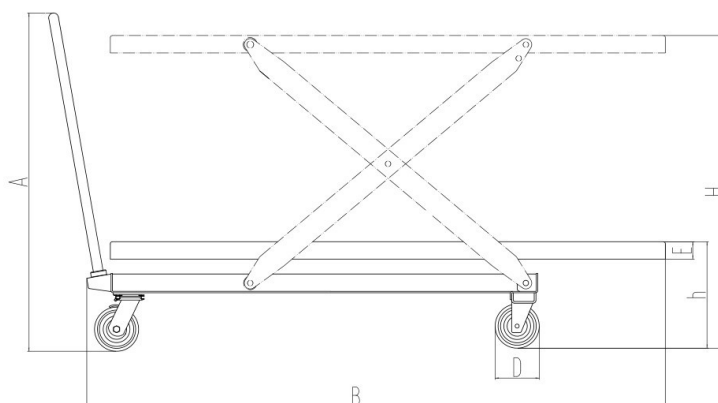


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

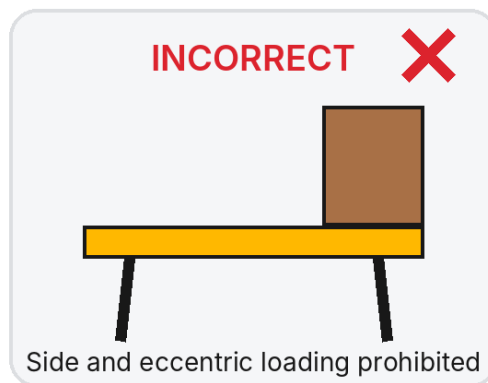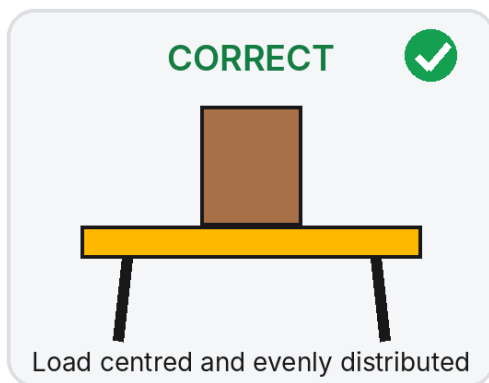

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 500 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.