

MOBILE SCISSOR LIFT TABLE

MPS800

A robust solution for lifting, lowering and short-distance transport of loads up to 800 kg.



MPS800 - lifting height 1000 mm, service weight 115 kg.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS800 is designed for short-distance transport and for lifting and lowering goods. It can also be used as a mobile work surface in workshops, warehouses, production areas and service departments.



- **Heavy-duty capacity**

Rated for loads up to 800 kg with robust 150 mm wheels for easy rolling.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 1000 x 510 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Robust running gear**

150 mm wheels and a service weight of 115 kg support easy handling.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

WAREHOUSING AND PACKING

Move cartons and prepare goods for packing or dispatch.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

An 800 kg rated capacity and a 1000 x 510 mm platform for heavy assemblies, moulds and machine parts.

Parameter	MPS800
DELACCO model	MPS800
Rated capacity	800 kg
Maximum platform height	1000 mm
Minimum platform height	420 mm
Platform dimensions (L x W x H)	1000 x 510 x 55 mm
Handle height	996 mm
Overall length	1150 mm
Pedal strokes to maximum height	<= 70
Wheel diameter	150 mm
Cylinder working volume	207 ml
Hydraulic oil capacity	300 ml
Service weight	115 kg


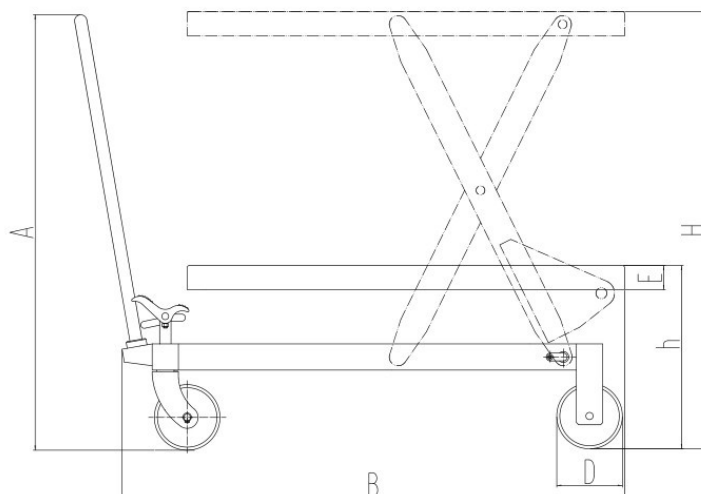


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

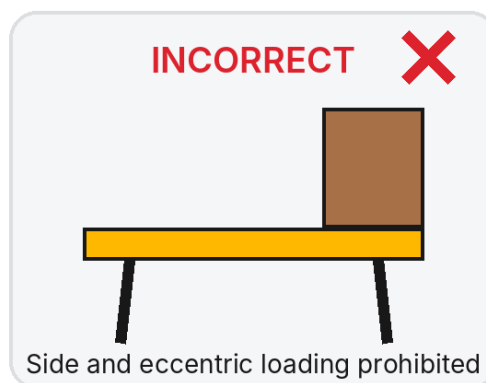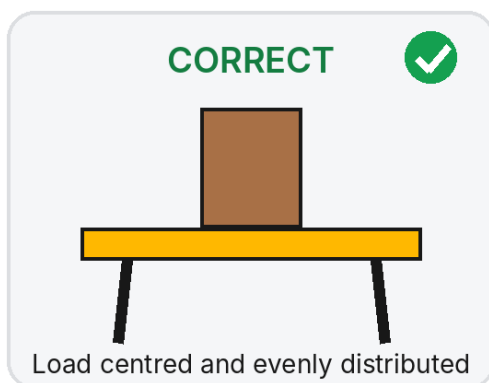

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm, level and horizontal ground.
- Do not exceed the rated capacity of 800 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com
sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.