

ROUGH-TERRAIN MOBILE LIFT TABLE

MPS200

A robust solution for lifting, lowering and short-distance transport of loads up to 200 kg - also over uneven surfaces.



MPS200 with large 200 mm wheels for use on rough and uneven ground.

DELACCO

MATERIAL HANDLING

LIFT LOADS TO AN ERGONOMIC WORKING HEIGHT

The MPS200 is designed for short-distance transport and for lifting and lowering goods. Large-diameter wheels allow it to be used on rough, uneven and outdoor surfaces as well as in workshops, warehouses, production areas and service departments.



- **Rough-terrain mobility**

Large 200 mm wheels roll easily over uneven and rough surfaces.

- **Simple lifting**

Raise the platform by repeatedly pressing the foot pedal.

- **Controlled lowering**

The handle-mounted release lever provides gradual, controlled lowering.

- **Stable platform**

A solid 1000 x 500 mm steel platform supports evenly distributed loads.

- **Secure positioning**

The caster brake helps stabilise the table during loading and unloading.

- **Foldable handle**

The handle folds down for easier storage and transport.

Typical applications

WORKSHOPS AND SERVICE

Lift components, tools and parts to a comfortable working height.

PRODUCTION

Deliver materials to workstations and assembly lines.

YARDS AND OUTDOOR AREAS

Move goods over paved, gravel and other rough surfaces.

MAINTENANCE

Use as a mobile work surface for equipment and service tasks.


DELACCO

MATERIAL HANDLING

TECHNICAL DATA

The large wheel diameter provides ground clearance and easy rolling on rough terrain, while the 1000 mm lifting height covers ergonomic working positions.

Parameter	MPS200
DELACCO model	MPS200
Rated capacity	200 kg
Maximum platform height	1000 mm
Minimum platform height	340 mm
Platform dimensions (L x W x H)	1000 x 500 x 35 mm
Handle height	1056 mm
Overall length	1120 mm
Pedal strokes to maximum height	<= 25
Wheel diameter	200 mm
Cylinder working volume	120 ml
Hydraulic oil capacity	220 ml
Service weight	60 kg


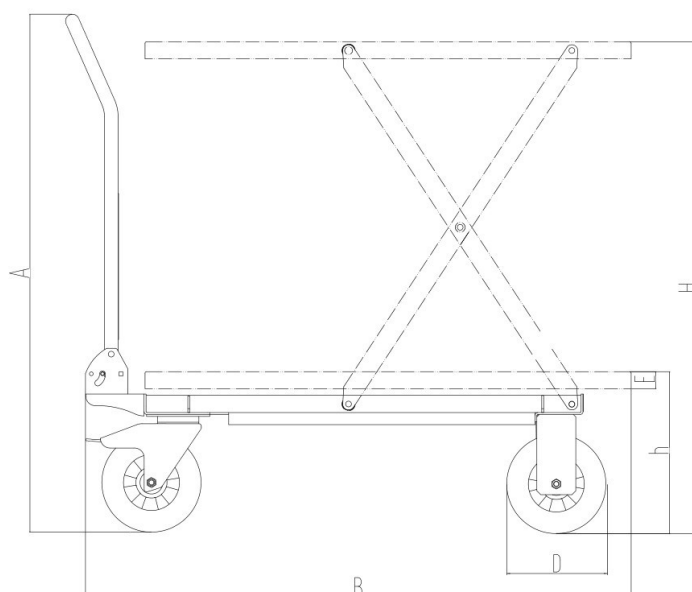


Dimensions: H - maximum height, h - minimum height, A - handle height, B - overall length, D - wheel diameter.

DELACCO

MATERIAL HANDLING

SAFE AND CORRECT OPERATION

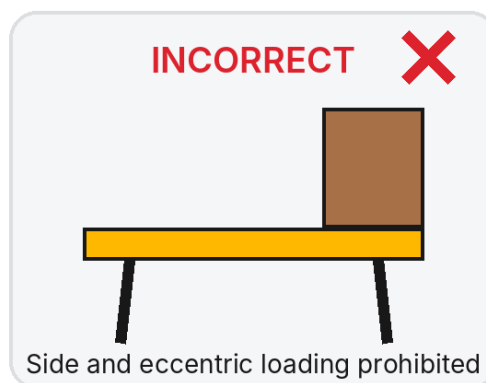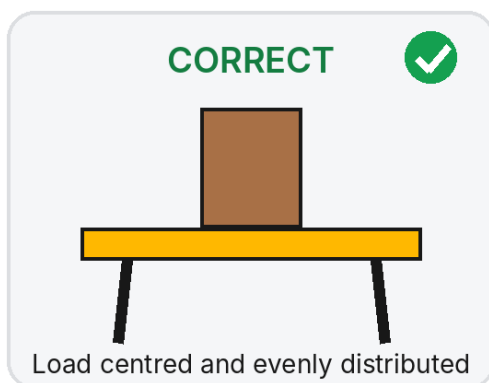

Essential safety instruction

This lift table is intended for lifting goods only. Never lift or transport people.

- Use the table only on firm and stable ground.
- Do not exceed the rated capacity of 200 kg.
- The load must be stable, centred and evenly distributed.
- Do not move the table while the platform is raised and loaded.
- Apply the caster brake during loading and unloading.
- Keep hands and feet clear of the scissor mechanism and the area below the platform.

DELACCO - equipment for safe lifting and material handling

delacco.com

sales@delacco.com

Technical data is based on the supplied manufacturer documentation. We reserve the right to modify the design and specifications without prior notice.